







# SPC-150NX

# TCSPC / FLIM Module

## Time-Correlated Single Photon Counting Module for Ultra-Fast Detectors

High-resolution version of SPC-150N TCSPC module  
 Improved resolution for ultra-fast detectors  
 Electrical IRF width 3.5 ps, FWHM  
 Internal timing jitter 1.6 ps RMS  
 Time-channel width down to 407 fs  
 Ultra-high IRF stability  
 Input discriminator bandwidth 4 GHz  
 Photon distribution and parameter-tag modes  
 Multi-detector / multi-wavelength capability  
 FLIM by bh Megapixel Technology  
 Mosaic FLIM mode  
 Multiscaler imaging mode  
 Parallel operation of 2, 3 or 4 modules  
 Reversed start/stop: Laser repetition rates up to 150 MHz  
 Saturated count rate 10 MHz

Ultra-fast fluorescence lifetime experiments  
 Anti-bunching experiments  
 Multi-wavelength lifetime experiments  
 Recording of transient fluorescence lifetime effects  
 Single-wavelength FLIM, multi-wavelength FLIM  
 Fast-acquisition FLIM, time-series FLIM  
 Mosaic FLIM, lateral, longitudinal, temporal mosaics  
 FLITS  
 Simultaneous PLIM and FLIM  
 Double-exponential FRET imaging  
 Recording of  $Ca^{2+}$  transients  
 fNIRS and NIRS experiments  
 Single-molecule spectroscopy  
 FCS, FCCS, PCH

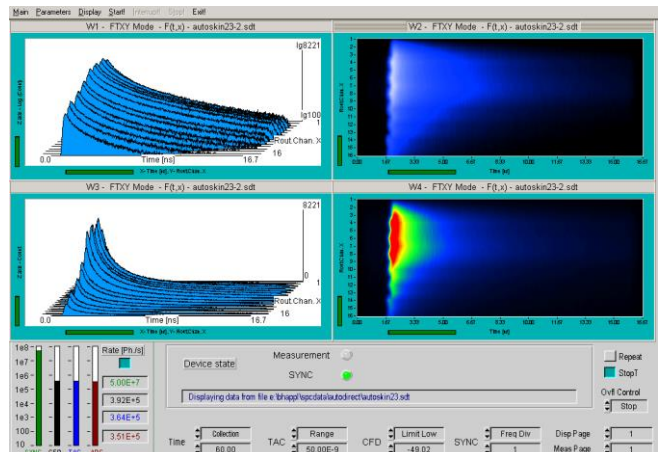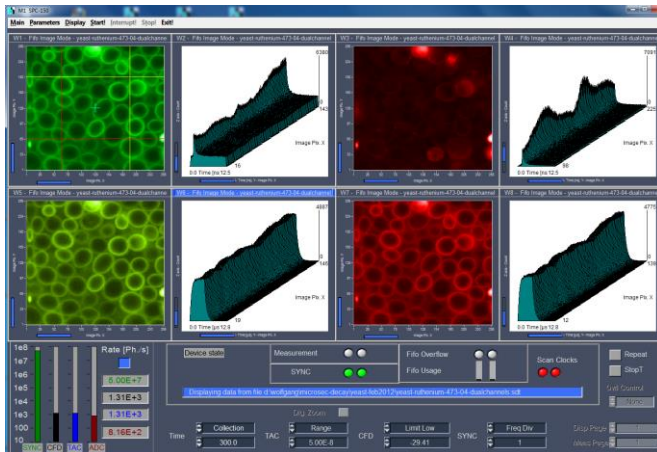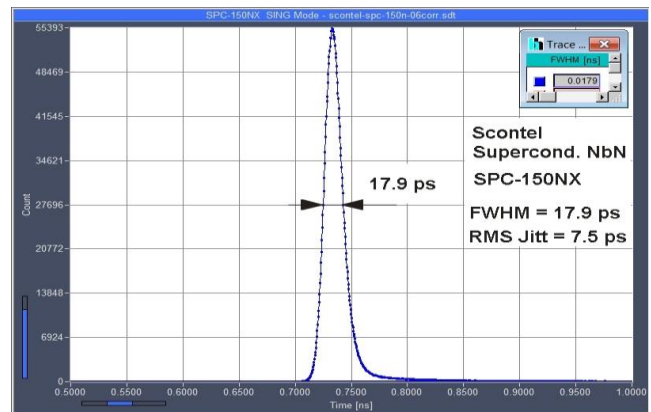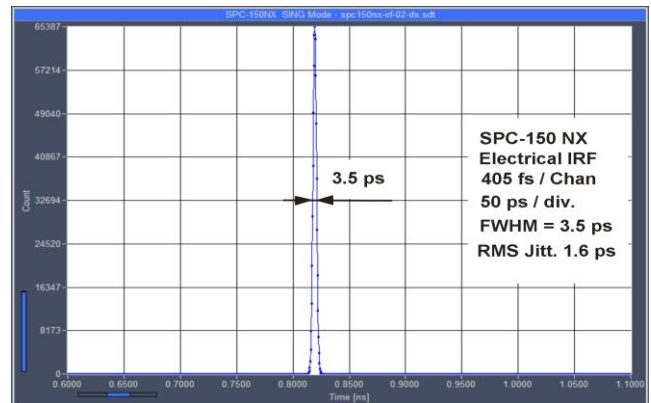

Becker & Hickl GmbH  
 Nunsdorfer Ring 7-9  
 12277 Berlin, Berlin  
 Tel. +49 30 212 80 02-0  
 Fax. +49 30 212 80 02-13  
 email: info@becker-hickl.com  
 www.becker-hickl.com



More than 25 years experience in multi-dimensional TCSPC. More than 2000 TCSPC systems worldwide.




# SPC-150NX

# TCSPC / FLIM Module

## Photon Channel

Principle  
 Discriminator Input Bandwidth  
 IRF width, FWHM  
 RMS timing jitter  
 Variance in time of IRF centroid  
 Optimum Input Voltage Range  
 Min. Input Pulse Width  
 Threshold  
 Zero Cross Adjust

Constant Fraction Discriminator (CFD)  
 4 GHz  
 <3.5 ps, FWHM  
 < 1.6 ps, RMS  
 <0.4 ps RMS over 100 seconds  
 - 30 mV to - 500 mV  
 200 ps  
 0 to - 250 mV  
 - 100 mV to + 100 mV

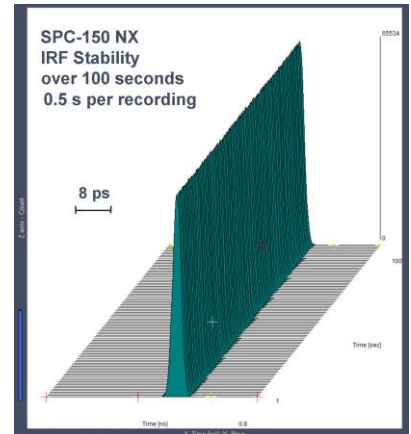

## Synchronisation Channel


Principle  
 Discriminator Input Bandwidth  
 Optimal Input Voltage Range  
 Min. Input Pulse Width  
 Threshold  
 Frequency Range  
 SYNC Frequency Divider  
 Zero Cross Adjust

Constant Fraction Discriminator (CFD)  
 4 GHz  
 - 30 mV to - 500 mV  
 200 ps  
 0 to -250 mV  
 0 to 150 MHz  
 1 - 2 - 4  
 -100 mV to + 100 mV

## Time-to-Amplitude Converters / ADCs

Principle  
 TAC Range  
 Biased Amplifier Gain  
 Biased Amplifier Offset  
 Time Range incl. Biased Amplifier  
 min. Time / Channel  
 ADC Principle  
 Diff. Nonlinearity, electrical

Ramp Generator / Biased Amplifier  
 25 ns to 2.5 us  
 1 to 15  
 0 to 50% of TAC Range  
 1.67 ns to 2.5 us  
 407 fs  
 50 ns Flash ADC with Error Correction  
 < 0.5% rms, typ. <1% peak-peak

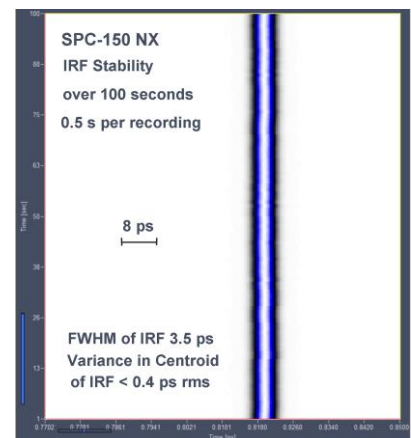

## Data Acquisition (Histogram Modes)

Method  
 Dead Time  
 Saturated Count Rate  
 Useful count rate  
 max. Counts / Time Channel (counting depth)  
 Overflow Control  
 Collection Time  
 Display Interval Time  
 Repeat Time  
 Sequential Recording  
 Synchronisation with Scanning  
 Routing  
 Count enable  
 Experiment Trigger

on-board multi-dimensional hardware histogramming process  
 100 ns, independent of computer speed  
 10 MHz  
 5 MHz  
 $2^{16}-1$   
 none / stop / repeat and correct  
 0.1 us to 100,000 s  
 10 ms to 100,000 s  
 0.1 us to 100,000 s  
 Unlimited recording by memory swapping  
 pixel, line and frame clocks from scanning device  
 7 bit TTL  
 1 bit TTL  
 TTL

## Data Acquisition (FIFO / Parameter-Tag Mode)

Method  
 Online display  
 FCS calculation  
 Number of counts of decay / waveform recording  
 Dead Time  
 Saturated count rate, peak  
 Sustained count rate (bus-transfer limited)  
 max. counts / time channel (counting depth)  
 Output Data Format (ADC / Macrotime / Routing)  
 FIFO buffer Capacity (photons)  
 Macro Timer Resolution, internal clock  
 Macro Timer Resolution, clock from SYNC input  
 Routing  
 External event markers  
 Count Enable Control  
 Experiment trigger

Parameter-tagging of individual photons and continuous writing to disk  
 Decay function, FCS, Cross-FCS, PCH, MCS traces  
 Multi-tau algorithm, online calculation and online fit  
 unlimited  
 100 ns  
 10 MHz  
 typ. 4 MHz  
 unlimited  
 12 / 12 / 4 bit  
 $2 \cdot 10^8$   
 50 ns, 12 bit, overflows marked by MTOF entry in data stream  
 10 ns to 100 ns, 12 bit, overflows marked by MTOF entry in data stream  
 4 bit TTL  
 4 bit, TTL  
 1 bit, TTL  
 TTL

## Data Acquisition, FIFO Imaging

Method  
 Online display  
 Synchronisation with scanner  
 Detector / Wavelength Channels  
 Image resolution, 64-bit SPCM software  
 No of time channels  
 No. of pixels, 1 detector channel  
 No. of pixels, 16 detector channels

Buildup of images from time- and wavelength tagged data  
 up to 8 images in different time and wavelength windows or from different modules  
 via Frame Clock, Line Clock, and Pixel Clock pulses  
 1 to 16

64	256	1024	4096
4096 x 4096	2048 x 2048	1024 x 1024	512 x 512
1024 x 1024	512 x 512	256 x 256	128 x 128

## Operation Environment

Computer System  
 Bus Connector  
 Used PCI Slots  
 Total power Consumption  
 Dimensions

PC Pentium, multi-core, >8GB RAM, Windows 10  
 PCI  
 1  
 approx. 12 W from +5V, 0.7 W from +12V  
 240 mm x 130 mm x 15 mm

## Related Products

SPC-150N, SPC-150NXX TCSPC modules  
 Simple-Tau 150 compact TCSPC systems  
 Simple-Tau 154 compact 4-channel TCSPC systems

HPM-100 GaAsP and GaAs hybrid detectors  
 PML-SPEC and MW-FLIM multi-wavelength detectors  
 PMC-150 cooled PMT modules

DCC-100 detector controller  
 BDL-SMN ps diode lasers  
 BDS-SM, -SMY, -MM picosecond diode lasers

## Related Literature

World Record in TCSPC Time Resolution: Combination of bh SPC-150NX with SCONTEL NbN Detector yields 17.8 ps FWHM. Application note, please see [www.becker-hickl.com](http://www.becker-hickl.com)  
 W. Becker, The bh TCSPC Handbook, 7th edition (2017). Available on [www.becker-hickl.com](http://www.becker-hickl.com). Please contact bh for printed copies.

## International Sales Representatives



US:  
**Boston Electronics Corp**  
 tcspc@boselec.com  
 www.boselec.com



UK:  
**Photonic Solutions PLC**  
 sales@psplc.com  
 www.psplc.com



Japan:  
**Tokyo Instruments Inc.**  
 sales@tokyoinst.co.jp  
 www.tokyoinst.co.jp



China:  
**DynaSense Photonics Co. Ltd.**  
 info@dyna-sense.com  
 www.dyna-sense.com