





# SPC-QC-004 TCSPC / Time-Tagger Module

## 3 / 4 Channel Time-Correlated Single Photon Counting Module

Three parallel TCSPC / FLIM channels plus  
one synchronisation / reference channel  
or  
Four absolute-timing channels  
Ultra-high discriminator bandwidth  
Excellent timing stability  
Low dead time  
High peak count rate

Recording of optical waveforms  
Excitation-multiplexed recording  
Multi-wavelength recording  
Photon time and parameter tagging


Fluorescence decay measurement  
LIDAR  
Anti-bunching experiments  
Coincidence experiments  
fNIRS and NIRS experiments  
Single-molecule spectroscopy  
Fluorescence correlation

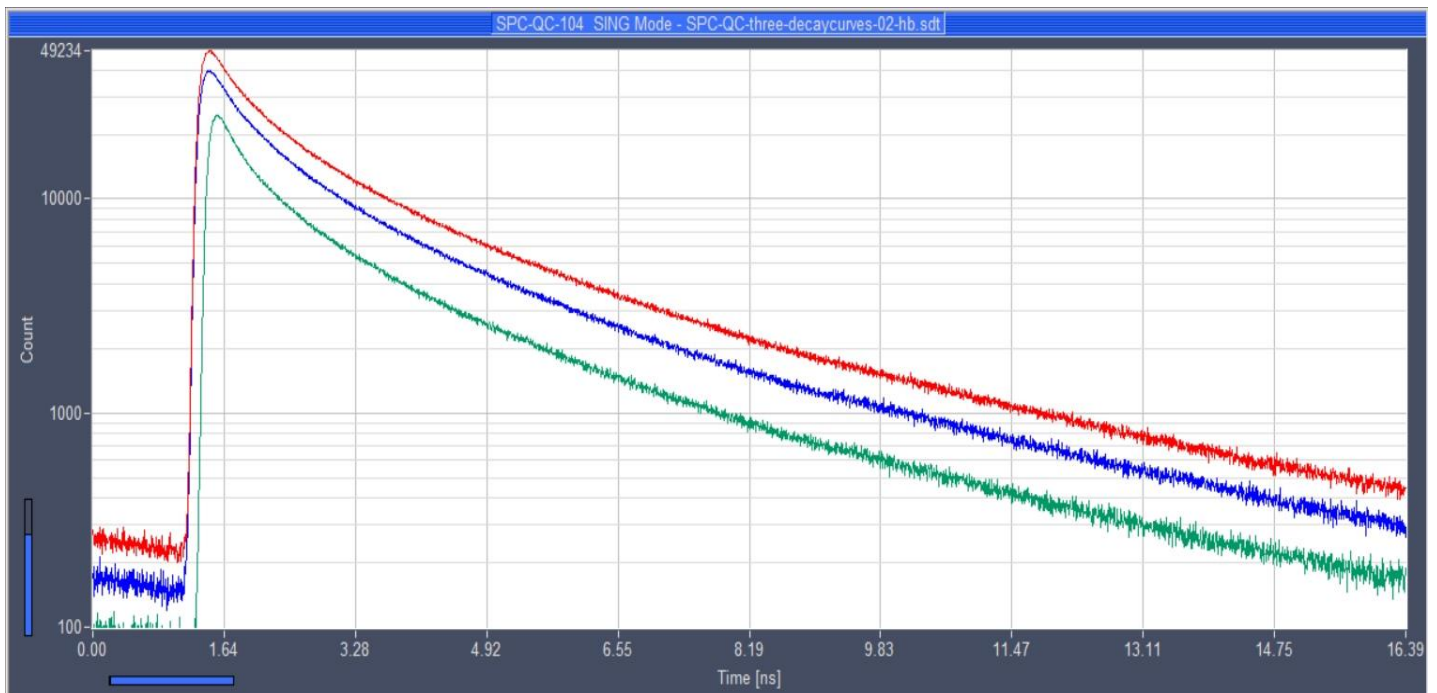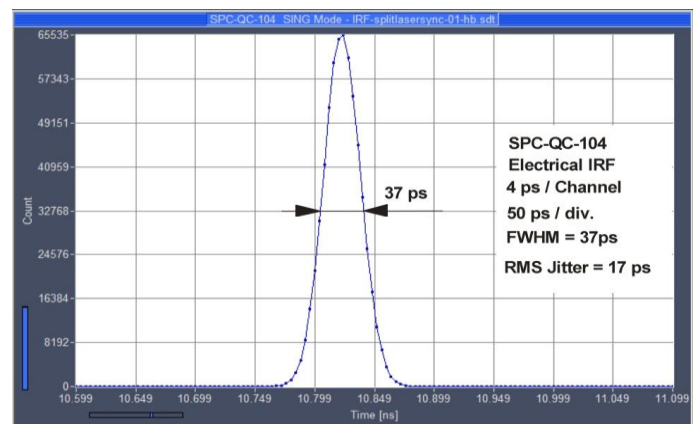


Becker & Hickl GmbH  
Nunsdorfer Ring 7-9  
12277 Berlin, Germany  
Tel. +49 30 212 80 02-0  
Fax. +49 30 212 80 02-13  
email: info@becker-hickl.com  
https://www.becker-hickl.com




# SPC-QC-004 TCSPC / Time-Tagger Module

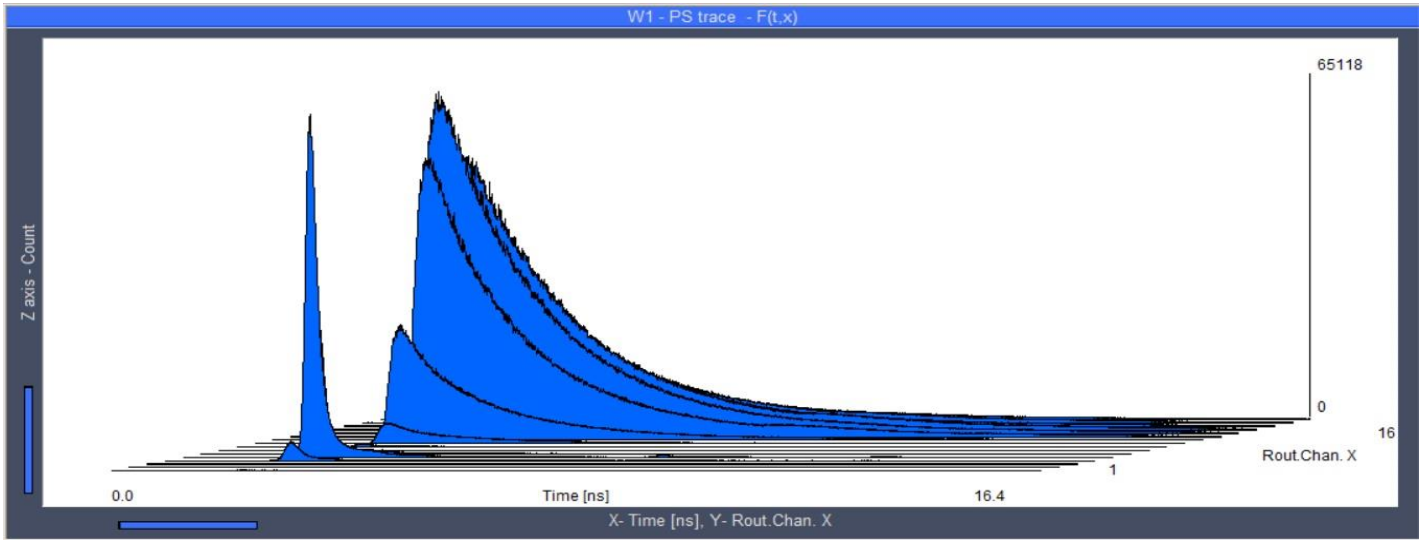


Fluorescence Decay, Multi-Wavelength Deconvolution

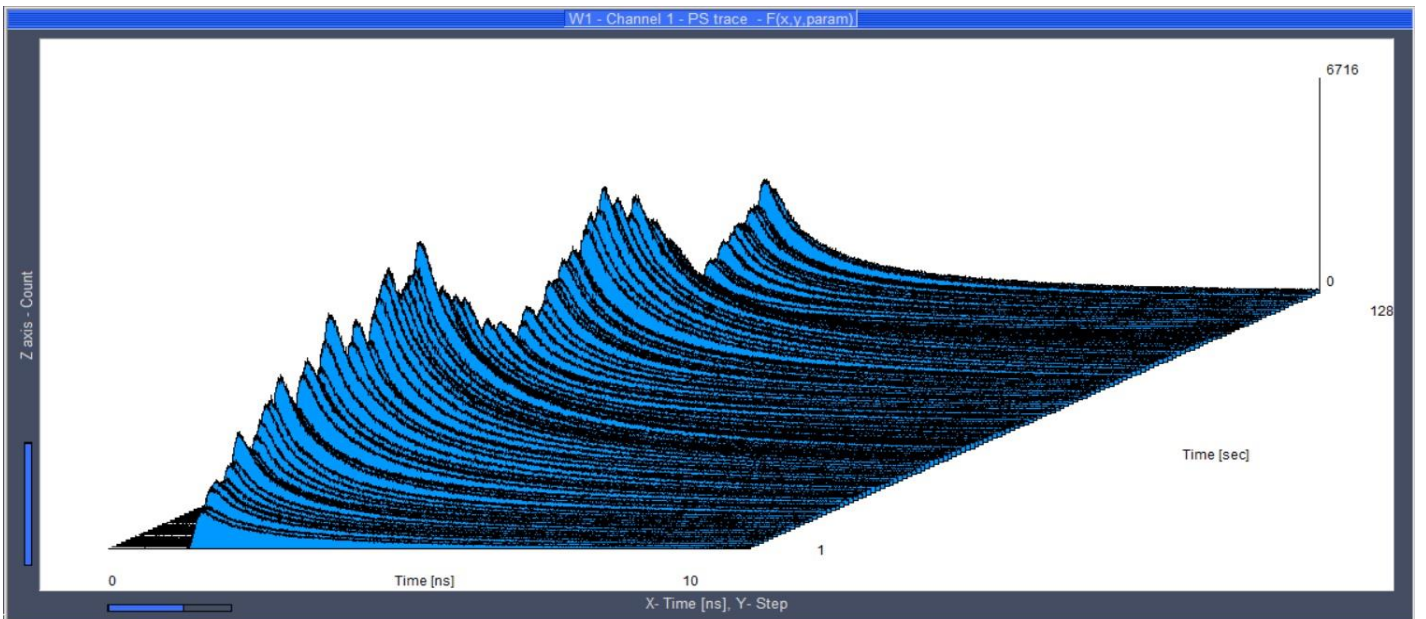


Fluorescence Decay, Time-Series Recording

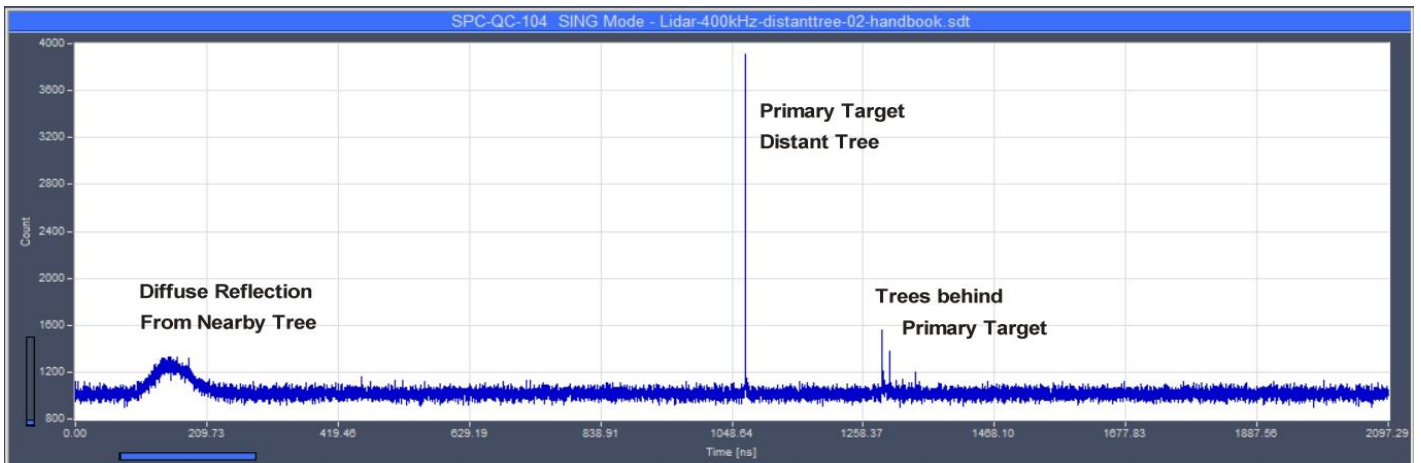


LIDAR

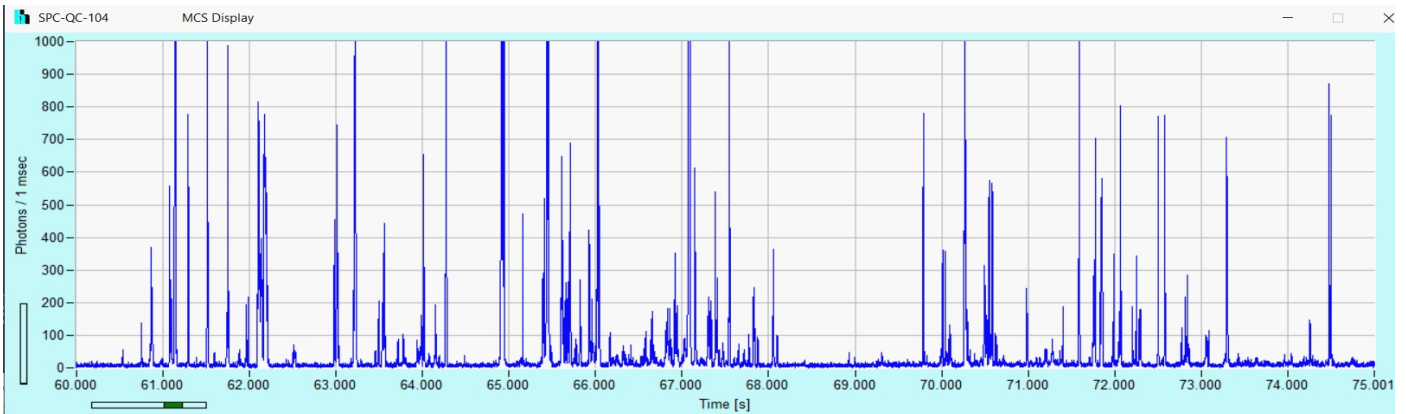

Fluorescent Particles, diffusion through Laser Focus

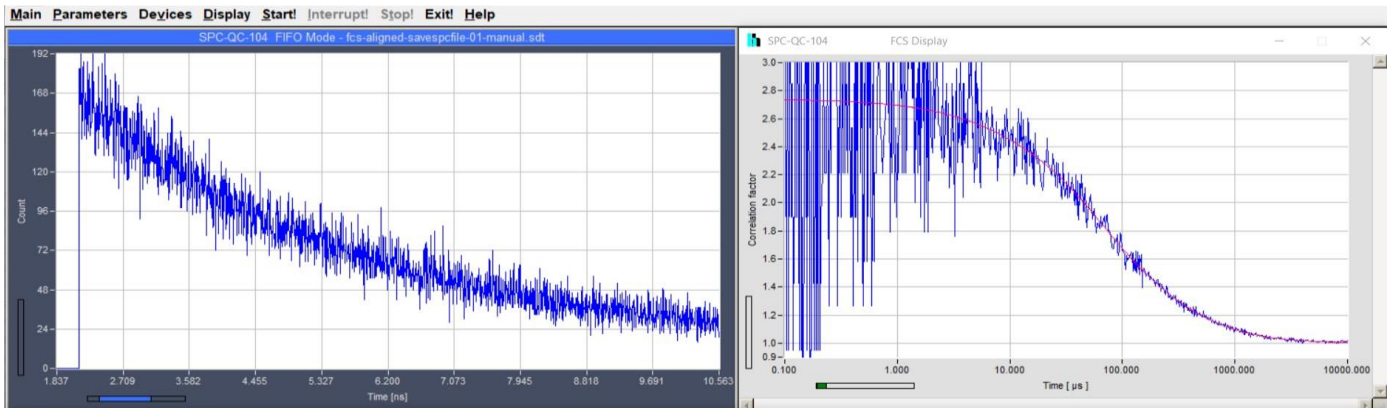

Fluorescence Decay / Fluorescence Correlation Measurement

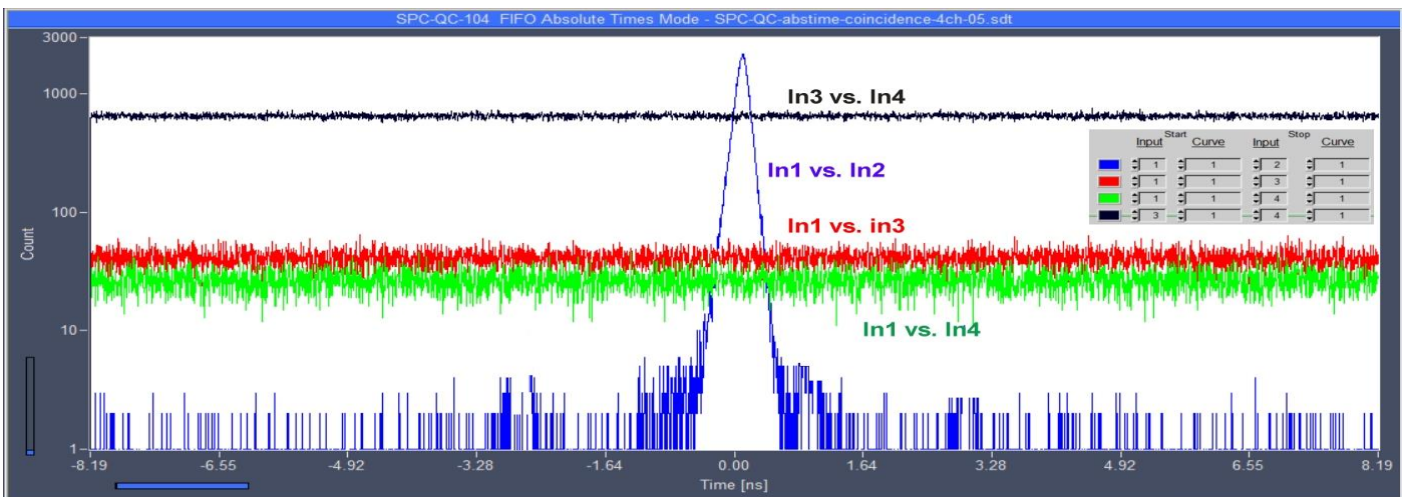

Coincidence Measurement



# SPC-QC-104

# TCSPC / FLIM Module

## Photon Channels


No. of channels	3 or 4
Principle	Constant Fraction Discriminator (CFD)
Discriminator Input Bandwidth	4 GHz
Optimum Input Voltage Range	-30 mV to -500 mV
Min. Input Pulse Width	200 ps
Threshold	0 to -500 mV
Zero Cross Adjust	-100 mV to +100 mV

## Synchronisation Channel / Fourth Photon Channel

Principle	Constant Fraction Discriminator (CFD)
Discriminator Input Bandwidth	4 GHz
Optimal Input Voltage Range	-30 mV to -500 mV
Min. Input Pulse Width	200 ps
Threshold	0 to -500 mV
Zero Cross Adjust	-100 mV to +100 mV
Frequency Range	0 to 120 MHz
SYNC Frequency Divider	1 - 2 - 4


## Time-Measurement Circuitry

Principle	Time-to-Digital Converter
IRF Width, FWHM	< 39 ps, FWHM
RMS Timing Jitter	< 18 ps, RMS
Time Range, at 4096 time channels	16 ns to 68 us
Min. Time / Channel	4 ps
Timing stability, range 16 ns, over 10 minutes	< 5 ps RMS
Diff. Nonlinearity	< 1 % RMS
Dead Time	8 ns

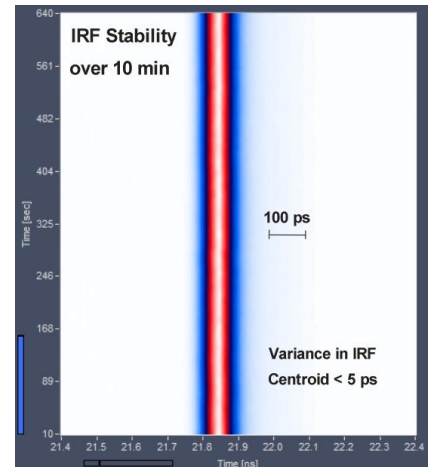

## Data Acquisition (Histogram Modes)

Method	on-board multi-dimensional hardware histogramming process
Peak Count Rate, each channel	120 MHz
Saturated count rate, continuous	40 MHz
Max. Counts / Time Channel (Counting Depth)	2 <sup>18</sup> -1
Max. No. of Time Channels	65,536
Overflow Control	none / stop / repeat and correct
Collection Time	0.1 us to 100,000 s
Display Interval Time	10 ms to 100,000 s
Repeat Time	0.1 us to 100,000 s
Synchronisation with Scanning (Imaging Mode)	pixel, line and frame clocks from scanning device
Routing	4 bit TTL
Count Enable	1 bit TTL
Experiment Trigger	TTL

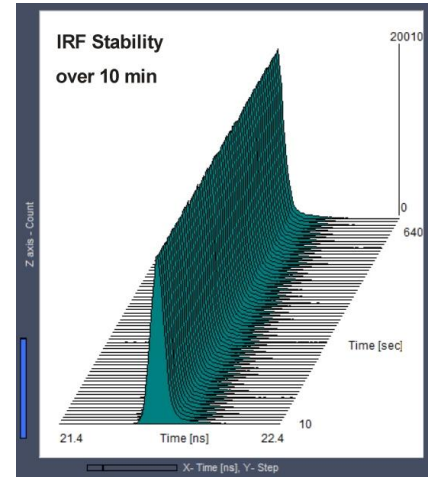

## Data Acquisition (FIFO / Parameter-Tag and Absolute-Time Mode)

Method	Parameter-tagging of individual photons, continuous writing to disk
Online Display	Decay function, FCS, Cross-FCS, PCH, MCS traces
FCS Calculation	Multi-tau algorithm, online calculation and online fit
Number of Counts of Decay / Waveform Recording	unlimited
Peak Count Rate	120 MHz
Sustained Count Rate (Bus-Transfer Limited)	10 MHz
Max. Counts / Time Channel (Counting Depth)	unlimited
Max. No. of Time Channels	4096
On-board FIFO Buffer Capacity (Photons, per Channel)	750,000
Macro Timer Resolution, Internal Clock	2 ns, overflows marked by MTOF entry in data stream
Routing	4 bit, TTL/CMOS
External Event Markers	4 bit, TTL/CMOS
Experiment Trigger	TTL/CMOS

## Operation Environment

Operating System	Windows 10, Windows 11
Bus Connector (Slot type)	PCI-ex
Total Power Consumption	approx. 12 W from +12V
Dimensions	205 mm x 110 mm x 15 mm

## Related Products

SPC-QC-104 three/four-channel TCSPC / FLIM module, SPC-180N, SPC-180NX, SPC-180NXX TCSPC modules, HPM-100 hybrid detectors, DCC-100PCIe detector controller  
BDS-SM ps diode lasers, BDS-MM picosecond diode lasers, SPCImage NG data analysis software

## Related Literature

SPC-QC-104, user manual. 92 pages, available on <https://www.becker-hickl.com>  
W. Becker, The bh TCSPC Handbook, 9th edition (2021). 950 pages, available on <https://www.becker-hickl.com>. Please contact bh for printed copies.  
The bh TCSPC Technique, Principles and Applications. Overview brochure, 27 pages, available on <https://www.becker-hickl.com>

## International Sales Representatives



US:  
Boston Electronics Corp  
tcspc@boselec.com  
www.boselec.com



UK:  
Photonic Solutions PLC  
sales@psplc.com  
www.psplc.com



Japan:  
Tokyo Instruments Inc.  
sales@tokyoinst.co.jp  
www.tokyoinst.co.jp



China:  
DynaSense Photonics Co. Ltd.  
info@dyna-sense.com  
www.dyna-sense.com